



AIR CONDITIONING



REFRIGERATION




HEATING



IN

Mini Orange[®]

CONDENSATE REMOVAL PUMP

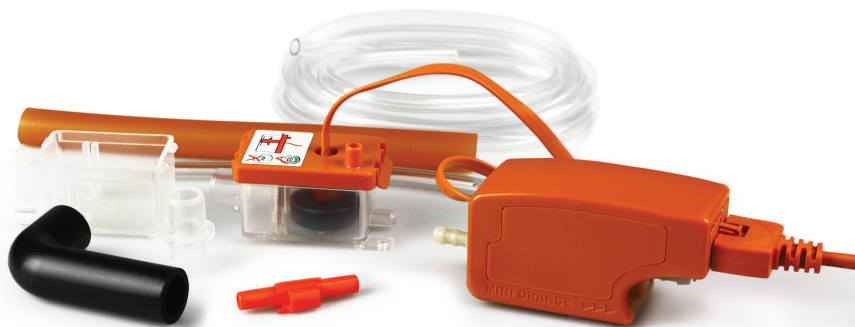

The world's best selling mini pump offers unrivalled reliability and performance.



12L/h max. flow



10m max. rec. head (flow rate 6L/h)



21dB(A)

KEY FEATURES


- Submersible secondary reservoir included
- Plug & play
- Anti siphon device

SUITABILITY

- Up to 16kW / 54,000Btu/h*
 - High wall split systems; Ducted units; Floor standing & Chassis units
- ✓ **Perfect for...** Smaller commercial & domestic units



0.25 kg†

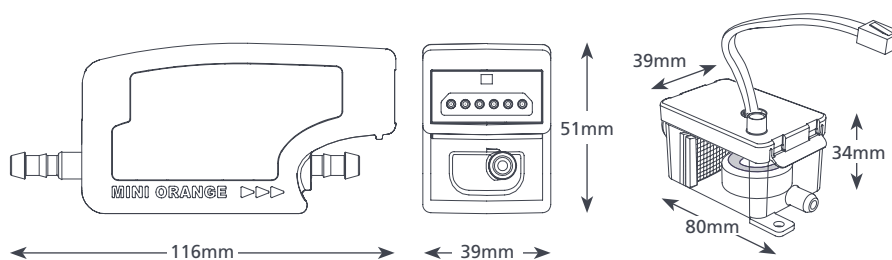


MINI ORANGE @ 230V 50Hz

Max. flow	12L/h @ 0 head
Max. rec. head	10m
Max. suction lift	2m
DB(A) @ 1m	21dB(A)
Power supply	230 VAC, 0.11A, 16W, 50/60Hz
Rated Class	Non continuous II appliance <input type="checkbox"/>
Max. unit output	16kW / 54,000Btu/h*
Max. water temp	40°C / 104°F
Discharge tube	6mm ID
IP Protection	IP21
Safety switch	3.0A Normally closed
Thermal protection	✓
Fully potted	✓
Self priming	✓

MINI ORANGE OPTIONS

Mini Orange FP2212/FIL

† Pump only
* When high humidity, reduce duties by 20%

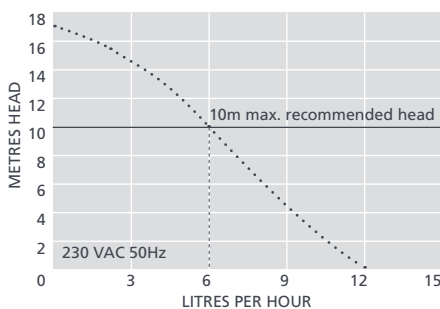

IN THE BOX

- Mini Orange pump
- 1.5m Plug & play power cable
- 16mm Inline Filter
- Reservoir
- Reservoir lid with 1.5m sensor cable
- Submersible reservoir
- Anti siphon device
- Float & filter
- 1.5m Suction tube 6mm ID
- 220mm Orange inlet hose 14mm ID
- 150mm Vinyl breather tube 6mm ID
- Drain connector kit
- Fixing kit
- Install manual

- ⚠ Important! Please install the included inline filter
- 📖 Download manual at aspenspumps.com
- ▶ View install video at aspenspumps.com

Information correct at time of going to press.

